



Rebound Function
in Resistance




1.5 - 6s Quick
Lifting Speed




Long Remote
Control Range-30m



Negligible
Maintenance



24V DC
Brushless Motor



Convertible
Arm Direction

Parking Boom Barrier


TW-DCLD-7000

- The gate movement adopts a crank shaker drive mechanism which has a compact structure, enhanced rigidity, and convenient maintenance and operation.
- When the gate rod is in the horizontal or vertical state, the movement structure is completely self-lock, which can effectively protect the reducer from external force impact.
- Compared with ordinary gate movement, the parts are reduced by about 20% and the faults are less.

Specification

Verification	
Appearance Dimension	320mm * 250mm * 940mm
Power Supply	220V ± 10% 50 ~ 60Hz
Voltage	AC110V/220V
Motor	24v150w brushless 2-stage variable speed all copper DC motor
Remote Control Distance	≤ 30m
Waterproof Grade	IP45
Duty cycle	5 million
Weight	Approx 47kg
Working Environment	-30°C ~ +70°C
Box Thickness	Full-thickness 1.5mm
Boom Length	Straight Arm - 6m, Fencing Arm / Folding Arm - 4.5m
Operating Speed	1.5s - 6s adjustable (the specific operating speed is adjusted according to the rod type and rod length)
Motor Capacity	24V DC Brushless Motor

Dimension Drawing

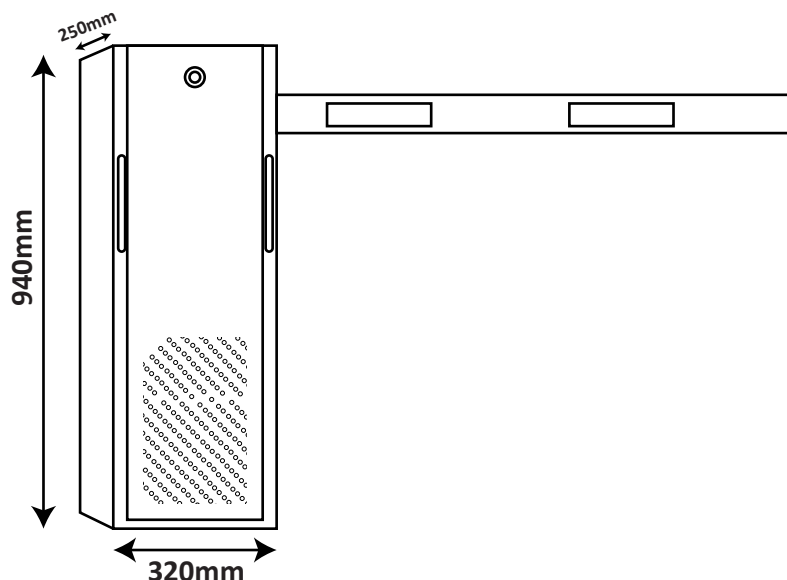

Address : Building No. 7425, Secondary No. 2188
 Al Olaya Street, Al Woroud District, Riyadh-12253,
 Kingdom of Saudi Arabia

Global Presence: India (H.O), Dubai, Nigeria

Phone : +966-539157364

Sales : sales@timewatcharabia.com

Support : 011-41916615

Disclaimer : All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.